

一、SPECIFICATIONS :


- 1、Rated Voltage: 0.66KV
- 2、Insulation Voltage: 2KV
- 3、Rated Frequency: 50HZ or 60HZ
- 4、Operating Temperature: -15°C to 60°C
- 5、Flame resistance: UL94-V0
- 6、Certificates:



二、FEATURES:

- 1、Small cost
- 2、Split core design ,Easier installation
- 3、Build diode ,no high voltage danger
- 4、Good linearity at very low current

三、DIMENSIONS( mm ):

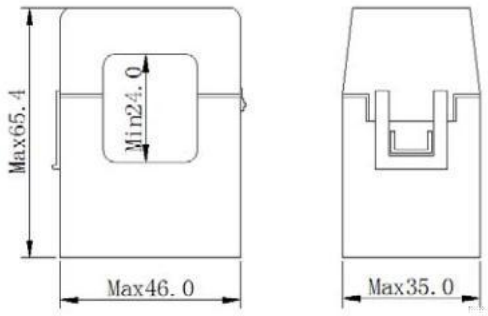

四、DIMENSIONS( mm ):

| Model             | Input (A) | Max current (A) | Turns (T) | Burden (Ω) | Output              |
|-------------------|-----------|-----------------|-----------|------------|---------------------|
| SCT024-200/66.6mA | 10A-200A  | 200             | 3000      | 100        | mA/0.333VAC/0-5 VAC |

五、CURVE PERFORMANCE:

