

Compact Waterproof Data Logger

TR-5i Series Features and Specs

Measurement Items

Temperature, Voltage,
4-20mA, Pulse Count

Data Collection

T&D Data Collection
Devices

Data Access

Local PC

Warning Notification

LED

The TR-51i with internal sensor provides optimum waterproof and dustproof capabilities.

Model	Measurement Items	Measurement Range	Notes
TR-51i	Temperature 1ch (internal sensor)	-40 to 80 °C	Gradual Response Time Optimum Waterproof and Dustproof Capabilities.
TR-52i	Temperature 1ch	-60 to 155 °C	External Sensor for Quicker Response Time Wide Selection of Optional Sensors Splashproof

The TR-55i allows for a variety of commercially available sensors to be connected to the included input module increasing the measurement possibilities.


Model	Measurement Items	Measurement Range	Notes
TR-55i-TC	Temperature 1ch (Thermocouple)	-199 to 1760 °C	For use with Thermocouple Sensor Types: K, J, T, S
TR-55i-Pt	Temperature 1ch (Pt100 / Pt1000)	-199 to 600 °C	Supports 3-wire and 4-wire Sensors High Precision Measurement in Wide Temperature Range
TR-55i-V	Voltage 1ch	DC 0 to 22 V	Measurement Resolution: Minimum of 0.1mV Preheat Function Scale Conversion
TR-55i-mA	4-20mA 1ch	0 to 20 mA	Operational up to 40 mA Scale Conversion
TR-55i-P	Pulse Count 1ch	Pulse Count: 0 - 61439 Input Signal: Contact Input / Voltage Input	Scale Conversion

Common Features

Collect Data using our Data Collection Device

Communication Port TR-50U2 (sold separately) for easy data download to a PC

Place logger on TR-50U2

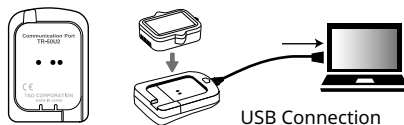

15 Recording Intervals with Large Logging Capacity

Up to 16,000 readings per unit. Select from 15 recording intervals (from 1 second to 1 hour).

Example: At a 60-minute recording interval, that gives you 666 days (almost 2 years) of non-stop recording.


Temperature Adjustment Function

Entering adjustment values beforehand makes it possible to view and record the adjusted measurement values.

Warning Monitoring Function

If a reading exceeds the set limit the warning LED will flash and an on-screen error message will appear. Warning display will stay on until data is downloaded.

Measurement and error message shown alternately

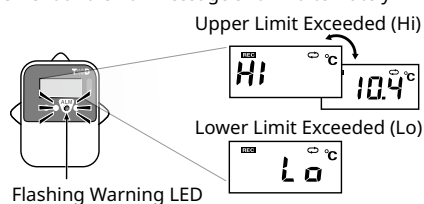

TR-51i / 52i Features

Durable Waterproof and Dustproof Body

A data logger built for tough environments

TR-55i Features

Scale Conversion (TR-55i-V / mA / P)

Upon the downloading of recorded data, the scale will be automatically converted according to pre-made settings. Graph will be displayed using the desired unit.

Two Recording Methods (TR-55i-V / mA)

Instantaneous: Records the measured value instantaneously at the set recording interval.

Average: Records the average of the measurements taken during the set recording interval.

Preheat Function (TR-55i-V)

This supplies power to the sensor immediately before measurement and turns off power until the next measurement. This saves battery life allowing for longer continuous recording.

TR-51i / 52i Specifications

	TR-51i	TR-52i
Measurement Channels	Temperature 1ch (Internal)	Temperature 1ch (External)
Sensor	Thermistor	Thermistor
Measurement Units	°C, °F	°C, °F
Measurement Range	-40 to 80 °C	-60 to 155 °C
Accuracy	Avg. ± 0.5 °C	Avg. ± 0.3 °C at -20 to 80 °C Avg. ± 0.5 °C at -40 to -20 °C 80 to 110 °C Avg. ± 1.0 °C at -60 to -40 °C 110 to 155 °C
Measurement Resolution	0.1 °C	0.1 °C
Responsiveness	Response Time (90 %): Approx 35 min.	Response Time (90 %): Approx. 80 sec. (in air) Approx. 7 sec. (in agitated water)
Logging Capacity	16,000 readings	
Recording Interval	Select from 15 choices: 1, 2, 5, 10, 15, 20, 30 sec. or 1, 2, 5, 10, 15, 20, 30, 60 min.	
Recording Mode	Endless (Overwrite oldest data when capacity is full) or One Time (Stop recording when capacity is full)	
LCD Display Items	Measurements, Recording Status, Battery Life Warning, etc.	
Communication Interfaces	Optical Communication	
Power	Lithium Battery LS14250 x 1	
Battery Life (*1)	Approx. 4 years	
Dimensions	H 62 mm x W 47mm x D 19 mm	
Weight	Approx. 45 g	
Operating Environment	-40 to 80 °C	
Waterproof Capacity	IP67: Immersion proof	IP64: Splash proof (rated for use in daily life)(*2)
Included Items	-	Temperature Sensor TR-5106
	Lithium Battery LS14250, Strap, Manual Set (Warranty Included)	
Data Collection Devices	TR-50U2 Other devices (*3)	

*1: Battery life depends upon multiple factors including measuring environment, recording interval, and quality of the battery being used.

*2: This is the waterproof capacity of the data logger with the sensor connected.

*3: Also compatible with the following discontinued products: TR-57DCi, TR-57U, RTR-57U, TR-50U, and TR-50C.

The specifications listed above are subject to change without notice.

TR-55i Specifications

	TR-55i-TC	TR-55i-Pt	TR-55i-V	TR-55i-mA	TR-55i-P
Measurement Channels	Temperature 1ch	Temperature 1ch	Voltage 1ch	4-20 mA 1ch	Pulse Count 1ch
Sensor	Thermocouple Type K, J, T, S	Pt100, Pt1000 3-wire, 4-wire (*1)	-	-	-
Measurement Units	°C, °F	°C, °F	V, mV	mA	P
Measurement Range	K -199 to 1370 °C J -199 to 1200 °C T -199 to 400 °C S -50 to 1760 °C	-199 to 600 °C	0 to 22 V	0 to 20 mA Operational up to 40 mA	
Accuracy (*2)	Thermocouple Measurement K, J, T : ±(0.3 °C + 0.3 % of reading) S : ±(1 °C + 0.3 % of reading) Cold Junction Compensation ±0.3 °C at 10 to 40 °C ±0.5 °C at -40 to 10 °C, 40 to 80 °C	±(0.3 °C + 0.3 % of reading) at 10 to 40 °C ±(0.5 °C + 0.3 % of reading) at -40 to 10 °C, 40 to 80 °C	±(0.5 mV + 0.3% of reading) at 10 to 40 °C ±(1 mV + 0.5 % of reading) at -40 to 10 °C, 40 to 80 °C	±(0.05 mA + 0.3 % of reading) at 10 to 40 °C ±(0.1mA + 0.3 % of reading) at -40 to 10 °C, 40 to 80 °C	Input Signal Non-voltage Contact Input Voltage Input (0 to 27 V) Detection Voltage Lo: 0.5 V or less Hi: 2.5 V or more Input Impedance Approx.100 KΩ pull up Chattering Filter ON: 15 Hz or less OFF: 3.5 kHz or less Maximum Count 61,439/Recording Interval
Note: The temperature range shown above represents the operating environment of the Input Module.					
Measurement Resolution	K, J, T: 0.1 °C S: approx. 0.2 °C	0.1 °C	Up to 400 mV : 0.1 mV Up to 800 mV : 0.2 mV Up to 999 mV : 0.4 mV Up to 3.2 V : 1 mV Up to 6.5 V : 2 mV Up to 9,999 V : 4 mV Up to 22 V : 10 mV	0.01 mA	
Logging Capacity	16,000 readings				
Recording Interval	Select from 15 choices: 1, 2, 5, 10, 15, 20, 30 sec. or 1, 2, 5, 10, 15, 20, 30, 60 min.				
Recording Mode	Endless (Overwrite oldest data when capacity is full) or One Time (Stop recording when capacity is full)				
LCD Display Items	Measurements, Recording Status, Battery Life Warning, etc.				
Communication Interfaces	Optical Communication				
Power	Lithium Battery LS14250 x 1				
Battery Life (*3)	Approx. 14 months	Approx. 24 months	Approx. 16 months	Approx. 16 months	Approx. 16 to 24 months
Dimensions	H 62 mm x W 47 mm x D 19 mm (excluding protrusions and sensor)				
Weight	Approx. 45 g				
Operating Environment	-40 to 80 °C				
Waterproof Capacity	IP64: Splash proof (rated for use in daily life) (*4)				
Included Items	Input Module TCM-3010 (sensor not provided)	Input Module PTM-3010 (sensor available as option)	Input Module VIM-3010	Input Module AIM-3010	Input Module PIC-3150
Lithium Battery LS14250, Strap, Manual Set (Warranty Included)					
Data Collection Devices	TR-50U2 Other devices (*5)				

*1: In the case of a 4-wire sensor, one wire will be left unused.
 *2: For TR-55i-TC and TR-55i-Pt, sensor inaccuracies are not included.
 *3: Battery life varies depending upon multiple factors including ambient temperature, recording interval, frequency of communication, and battery performance. All estimates are based on operations carried out with a new battery and are in no way a guarantee of actual battery life.
 *4: This is the waterproof capacity of the data logger with the Input Module connected. Input Module itself is not water resistant.
 *5: Also compatible with the following discontinued products: TR-57DCi, and TR-50U.
 The specifications listed above are subject to change without notice.