

Communication Port

TR-50U2 Features and Specs

Communication with PC
USB


Communication with Loggers
Optical Communication

The TR-50U2 is a communication port for making settings in and downloading data to PC from our loggers.

Simple USB Connection to PC

Communication can be carried out by simply connecting to a PC and placing the logger face down on the TR-50U2. Compatible with some discontinued products.

Place logger on TR-50U2

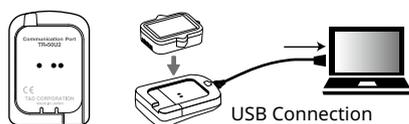

	TR-50U2
Compatible Devices	TR-51i / 52i / 55i-TC / 55i-Pt / 55i-V / 55i-mA / 55i-P Other devices (*1)
Communication Interfaces	Optical Communication USB 2.0 (Mini-B connector)
Communication Time	Data Download Time About 20 sec.
Power	USB bus power
Dimensions	H 80 mm x W 56 mm x D 16.5 mm (excluding protrusions)
Weight	Approx. 25 g
Operating Environment	Temperature: -10 to 60 °C Humidity: 90 %RH or less (no condensation)
Included Items	USB Mini-B Cable US-15C, Manual Set (Warranty Included)

*1: Also compatible with the following discontinued products: TR-51S/52S, and TR-51A/52.

The specifications listed above are subject to change without notice.